

Product data sheet

Specifications



EC Axial Fan , Two Ball Bearing ,
AC 230V , CE , IP22

Model number: F2E-1225B23VRP

Order number: 2029.001

General Specification

Item	Description	Condition	
1-1. Dimension	120×120×25 mm		
1-2. Bearing Type	Two Ball Bearing		
1-3. Rated Voltage	230 VAC		
1-4. Operating Voltage	150-240 VAC		
1-5. Start-up Voltage	150 VAC	25°C Power ON/OFF	
1-6. Operating Frequency	50~400 Hz	A. At Rated Voltage	
1-7. Rated Power	2.60 W MAX: 3.50 W	B. 25°C	
1-8. Rated Speed	2600 Rpm/min±10%	C. 65%RH	
1-9. Max. Air Flow	73.72 CFM	D. Measured after 5 minutes	
	2.09 m ³ /min		
1-10. Max. Static Pressure	4.86 mmH ₂ O		A. PQ Measurement Apparatus
	0.19 inchH ₂ O		B. AMCA Standard: AMCA
1-11. Noise Level	37.0 dBA Max: 41.0 dBA	C. Rated Voltage	
		D. Rated Current	
1-12. Life Expectancy	70000 hrs at 25°C	Failure Criteria: A: Speed <15% of original B: Current >15% of original C: Fan not running	
1-13. Weight	/ grams		
1-14. Packing	1 pcs/Carton		
1-15. Pole	4 Poles		
1-16. Rotation Direction	Anticlockwise (viewed from fan blade)		

1-17. Other Features	Tachometer Output	<input type="checkbox"/>	FG
	Lock Rotor Alarm	<input checked="" type="checkbox"/>	RD
	Low Speed Alarm	<input type="checkbox"/>	LD
	Auto Start	<input checked="" type="checkbox"/>	AS
	Soft Start	<input checked="" type="checkbox"/>	SS
1-17. Other Features	Speed Control Modes	<input checked="" type="checkbox"/>	PWM
		<input type="checkbox"/>	VC
<input type="checkbox"/>		TC	
	Waterproof Level	<input checked="" type="checkbox"/>	IP22

Electrical Specification

Item	Condition
2-1. Locked Rotor Protection	<input type="checkbox"/> Safety Condition
	<input checked="" type="checkbox"/> Auto power off after locking at rated voltage for 1-3 seconds; Automatic restart attempt every 2-6 seconds; No damage after 72-hour locking
2-2. Polarity Protection	<input type="checkbox"/> Open circuit when Vcc & GND are reversed
	<input type="checkbox"/> Circuit undamaged within 5 seconds of reverse connection
2-3. Insulation Resistance	<input checked="" type="checkbox"/> At least 10MΩ at 500 VDC between housing and both lead wires
2-4. Dielectric Strength	<input checked="" type="checkbox"/> Withstand 500 VAC for 1 minute (1mA) between housing and lead wires

Specification of Main Materials


Item	Specification
3-1. Frame	PBT UL94V-0
3-2. Propeller	PBT UL94V-0
3-3. Bobbin	PBT UL94V-0
3-4. Lead Wires (Out of Frame)	UL 1007 24AWG, Black-Black, 330±10 mm, (Not Contain Connector) UL 1007 26AWG ,Gray-Yellow-Blue, 330±10 mm, (Not Contain Connector)
3-5. Connector	NO
3-6. Label Marking	Model : F2E-1225B23VRP Rated Voltage : AC 230V Rated Power : 3.50W

Environmental Specification

Item	Condition
4-1. Operating Temperature/Humidity	Temperature : -10~+70℃
	Humidity : 15%~90% RH
4-2. Storage Temperature/Humidity	Temperature : -40~+85℃
	Humidity : 15%~90% RH

P-Q Characteristic Curve Test

Test Conditions and Methods	
Constant Voltage:	Rated Voltage
Barometric Pressure:	752.4 mmHg
Relative Humidity:	66.825 % RH
Temperature:	25 °C
Test Data:	
Max Flow Rate:	73.72 CFM
Max Ps:	4.86 mmAq

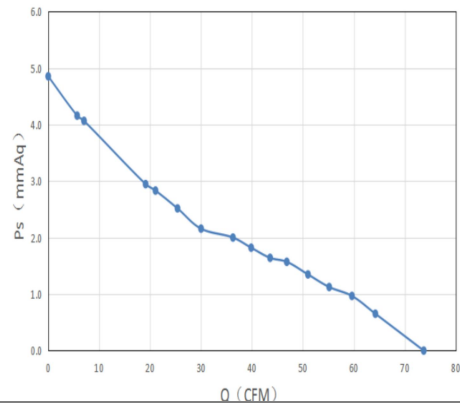


Purpose Description

Test Condition	Test Method
1. Temperature: 26 °C	1. Test Position: 180°
2. Humidity: 62 %RH	2. Test Distance: 1.0M from fan intake
3. At Rated Voltage	3. Background Noise: 14.8dB(A)
4. At Rated Speed	4. This test executes to ISO3745 standard


Test Equipment: AWA6290M double channels Acoustic Analyzer

Test Result: Leq: 37.0 dB(A)

Noise test method diagram

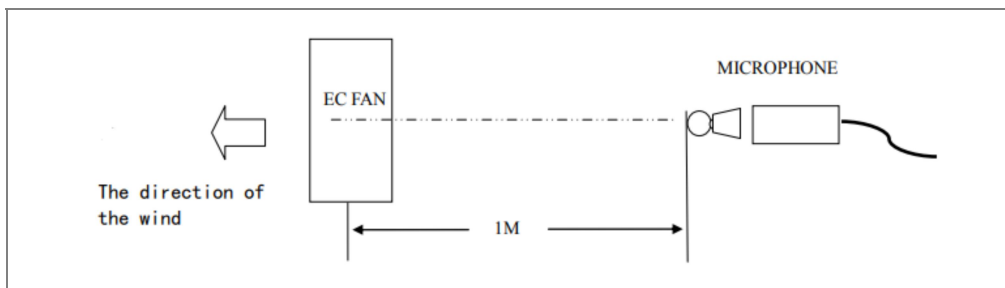


Shape Drawing

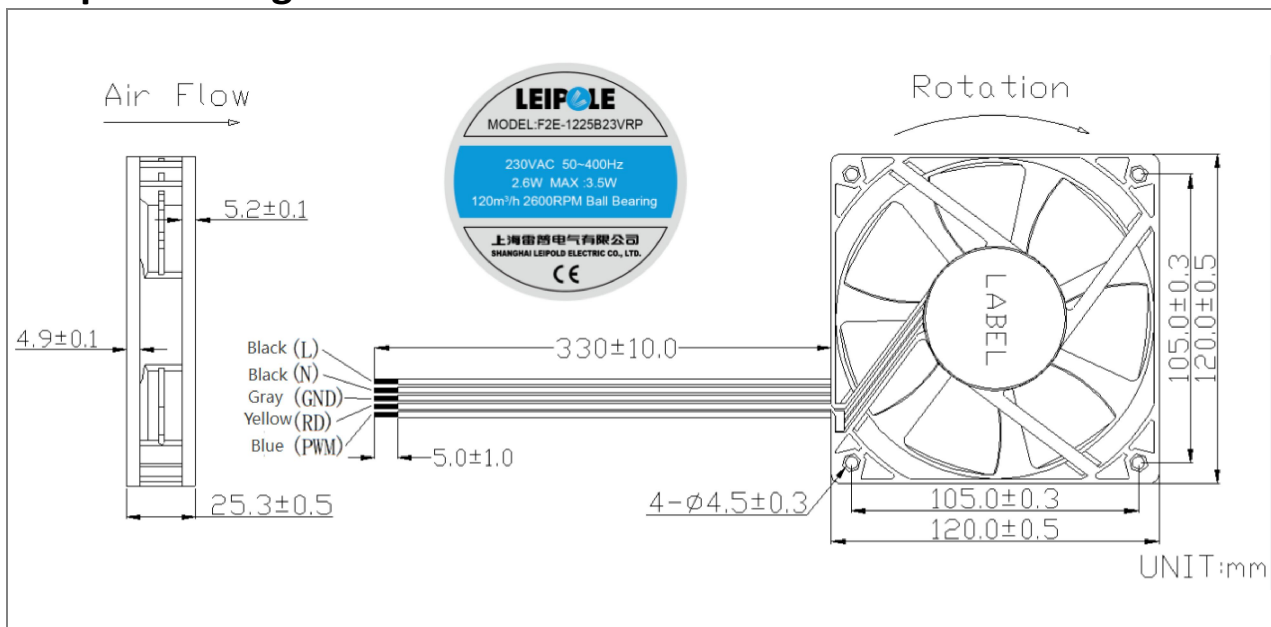

Wire Color Function Description

Black	L	Voltage input: AC200--240VAC
Black	N	Voltage input: AC200--240VAC
Gray	GND	Control input, signal output negative
Yellow	RD	Output signal: OC output; requires an external pull-up resistor, $I_r < 5\text{mA}$
Blue	PWM	PWM control input ($V_{inh} = 10\text{Vdc}$, $V_{inl} = 0\text{Vdc}$)

Label Marking

	Model:	F2E-1225B23VRP
	Rated Voltage:	230VAC
	Max Power:	3.50W
	Label Size:	Φ48 mm
	Label Color:	White
	Safety Approval:	CE


RD SIGNAL (ROTATION DETECTION)

RD: The signal pin outputs a low level when the rotor is running, and outputs a high level when the rotor is locked. External devices can determine whether the fan is running or stalled by monitoring the high or low levels.

1. RD Output Circuit: Open Collector Mode

2. Specification:

$V_{RD} = 15\text{Vmax}$ $R_{ext}(\text{min}) = V_{RD}/I_{\text{max}}$ $I_{\text{max}} = 5\text{mA}$ $V_{ce} = 1.0\text{Vmax}$

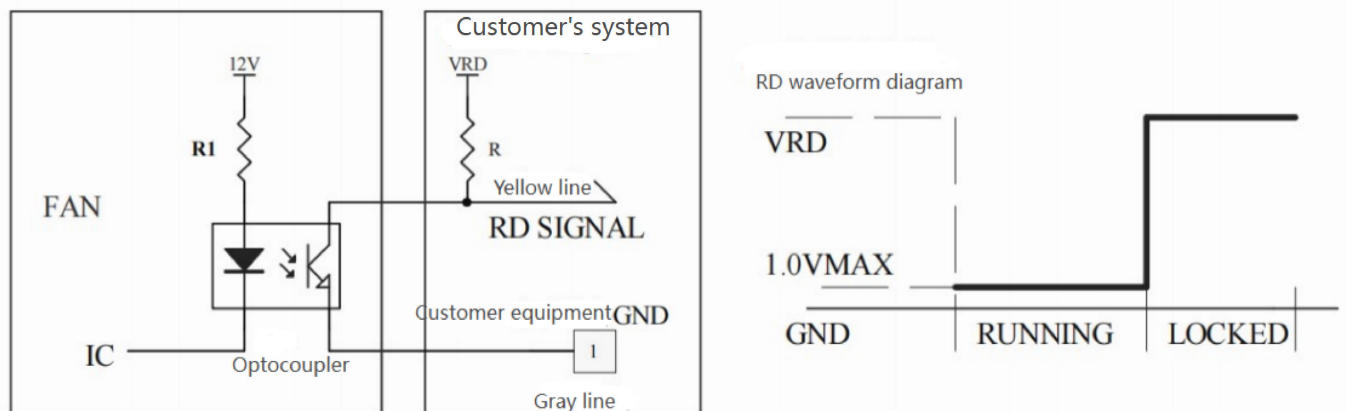


Note:

3. RD signal wire must not contact "+" and "-" leads.

4. RD alarm threshold is recommended to be set above 5V to avoid false alarms caused by ground line interference and large ripple.


PWM and Speed Curve

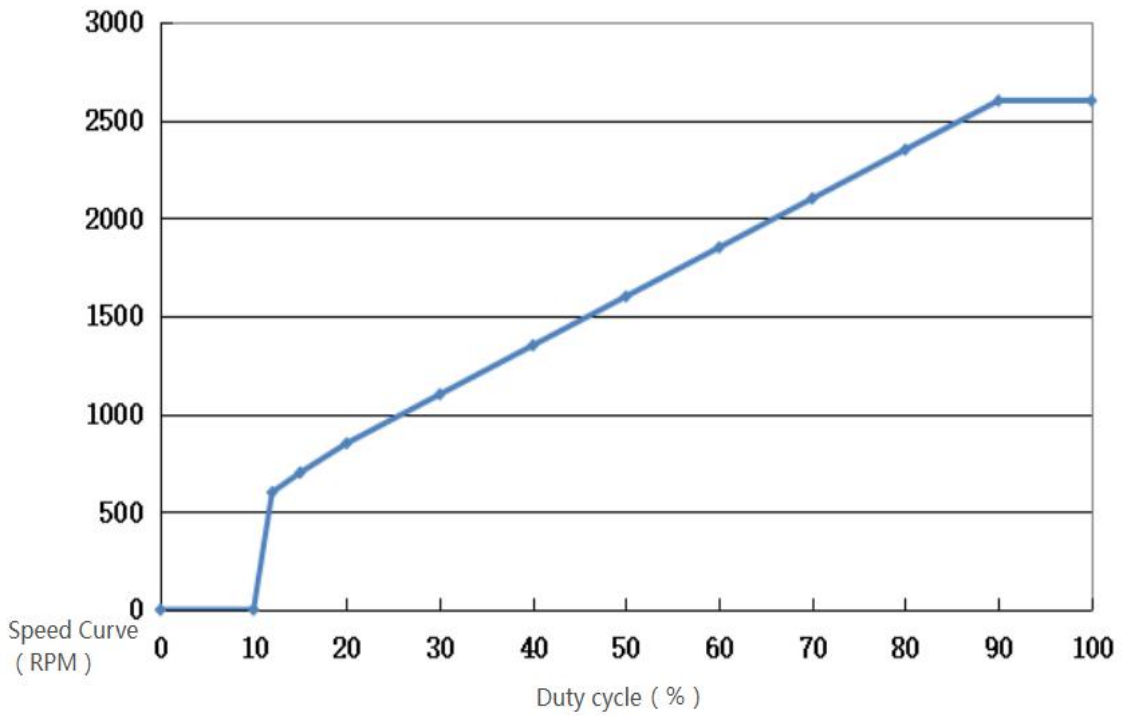

1. Curves Instructions

0%	0RPM
50%	1600±300RPM
100%	2600±10%RPM


2. PWM CONTROLR SIGNAL

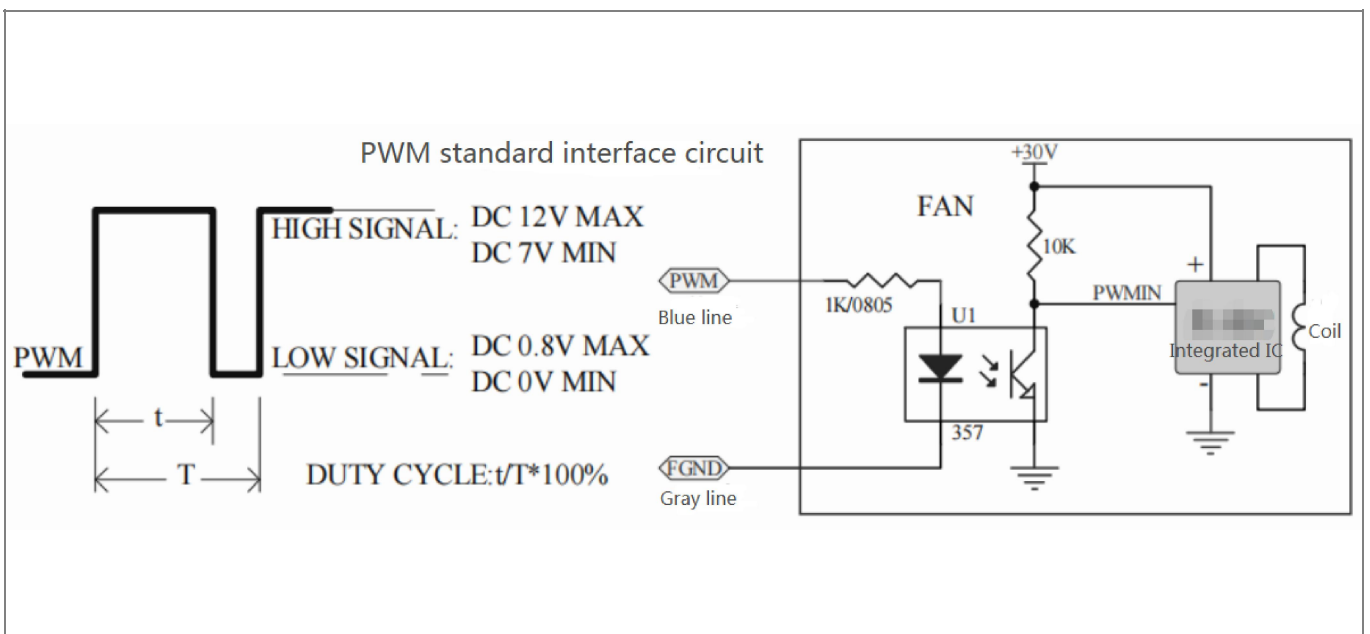


3. The Input PWM frequency range: 1Khz-30Khz


Fan installation method and screw torque recommendations

* **Flange Frame**

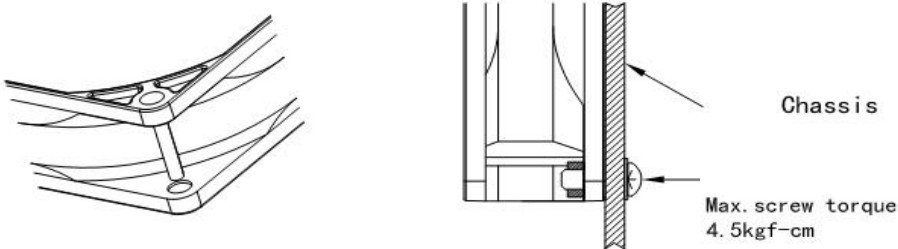


* **Rib Frame**

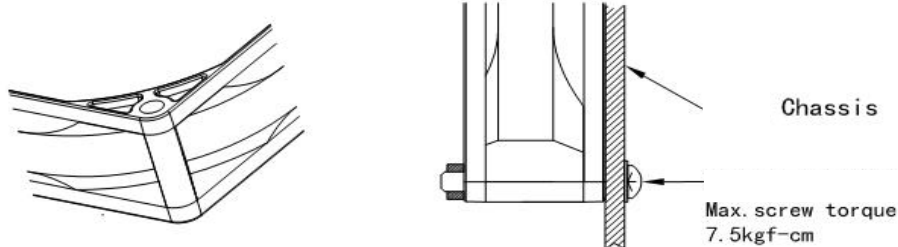


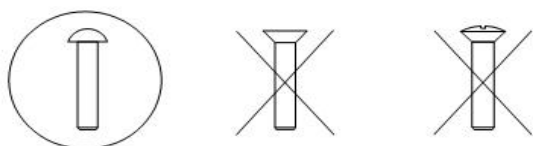* 

* Taper screw is prohibited for frame crack consideration.

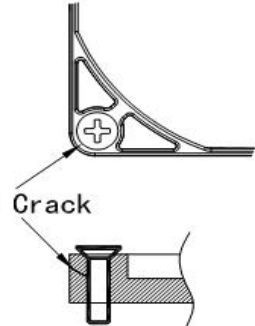* 

Screw locking adopts cross and step-by-step tightening method, which is generally tightened in two times; 30% of the specified torque is used for the first time, and four bolts 1 → 2 → 3 → 4 are tightened successively as shown in the figure. After the fan is locked flat, 100% of the specified torque is used for the second time.

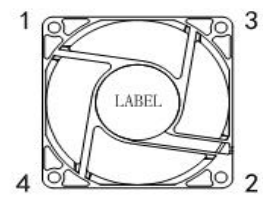

Notes

1. Do not exceed the limits specified in this specification during use; otherwise, we do not guarantee this product.

2. If any specification in this document needs to be changed, please be sure to put forward the request in advance.

3. Do not press the blades, wrap the power cord around the fan, or pull the power cord forcefully, as this will damage the shaft and power cord.

4. This product does not guarantee against shortened lifespan or defective products caused by the ingress of dust, water droplets, or small insects.

5. If there is any data or document inconsistent with this data, this data shall be the main reference.

6. Do not use in flammable gas or any harmful environment.

7. When assembling the fan, pay special attention to noise generated by resonance or vibration.

8. When the fan is being transported or operated, avoid dropping it: dropping from a height of 50cm or more will cause variation in the balance of the fan blades, and the ball bearings are prone to internal damage and abnormal noise.

9. Do not touch the blades when the fan is running, as this is very dangerous and may easily injure your fingers.
