

# Product data sheet

## Specifications



Thermostat (normally closed) , Bimetallic sheet , 35mm DIN rail installation, CE RoHS , IP20 , ABS , 0°C~+60°C

Model number: JSK0011R

Order number: 2021.009

## Technical Parameters

Rated working voltage:	230/115/60/48/24V (AC) 60/48 /24V (DC)
Inductive element:	Bimetallic sheet
Electric shock configuration:	Single stage conversion electric shock as an instantaneous switching element
Maximum switching capacity	250V AC, 10(2)A 120V AC, 15(2)A DC 30W
Temperature regulation range:	0°C~+60°C
Switch difference:	7K(±4K)
Safety certification:	CE RoHS
Protection level:	IP20

---

Electrical connection: Two pressure wire terminals, standard wire 0.5~2.5mm<sup>2</sup>

---

Installation requirements: 35mm DIN rail installation

---

Operating/Storage Temperature: -5°C~+80°C

---

## Materials

---

Product shell: ABS

---


## Product Description

---



JSK0011R temperature controller (normally closed): commonly used to connect heaters and disconnect the circuit when the temperature reaches the set value.

---

## Installation Diagram

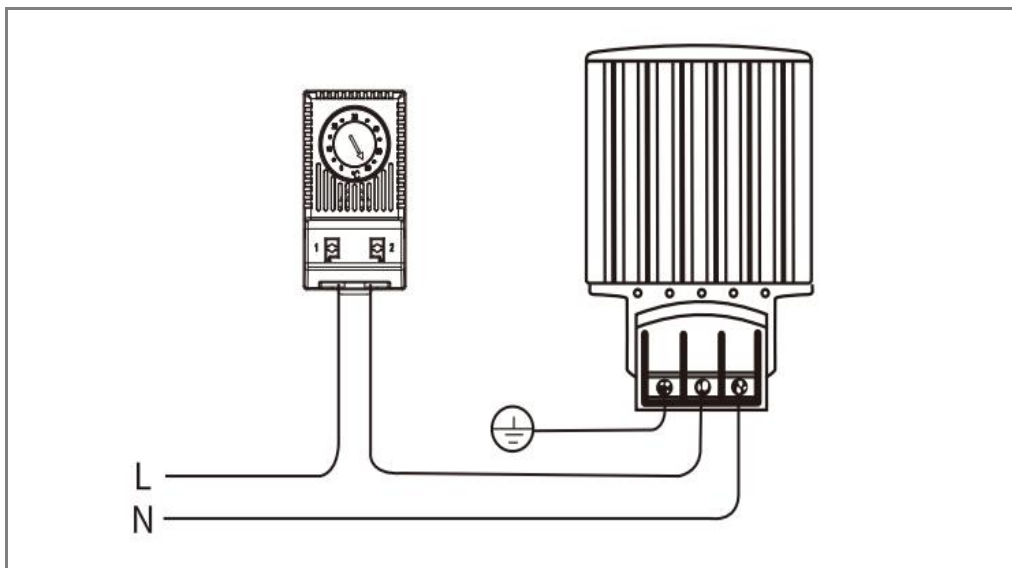

# Product drawings

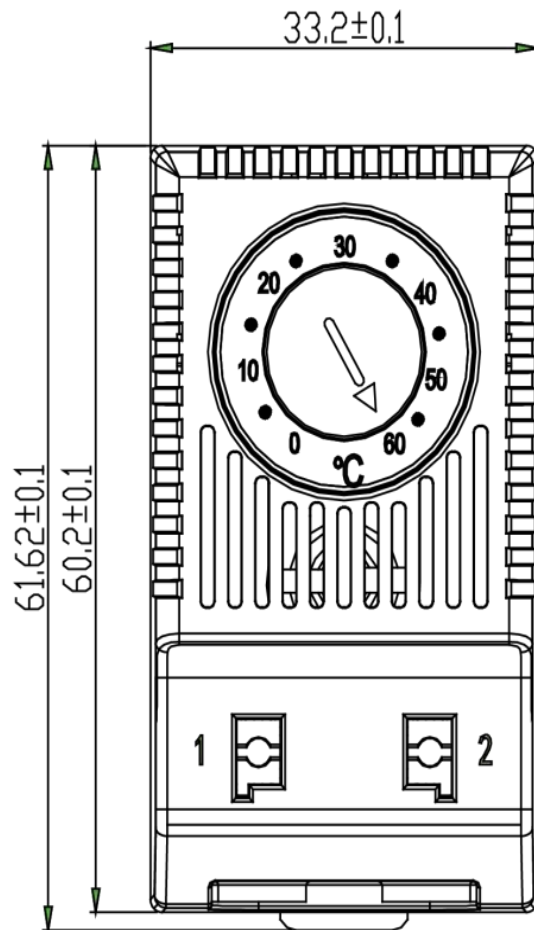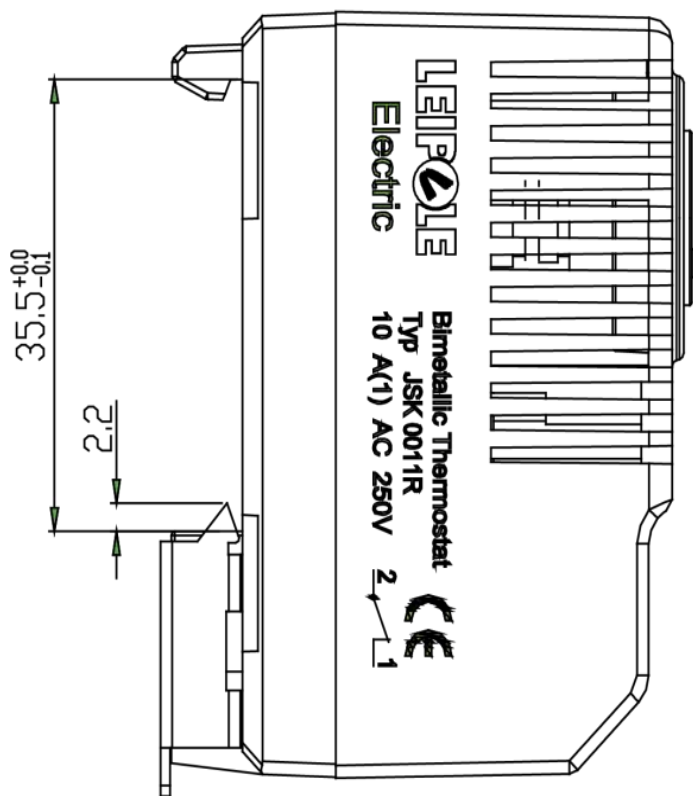

The circuit schematic is as follows

